




ECO ES FLECHA 1X4/ST/ E

### Product features

LED Decorative Surface IP65 solution, with UV stabilized curve diffuser designed to achieve uniform lit appearance, optimise light output .  
Polycarbonate diffuser, with Steel Clips 2800 lm, 19W, 125 lm/W, 4000 K, drive current 110 mA, Non dimmable, CRI80, IP65, IK08,

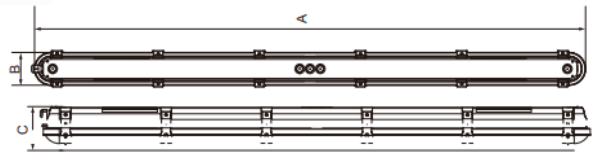

A 1190mm X B 95mm x C 75mm



## Product Overview

Housing	Polycarbonate
Diffuser material	PC Opal Polycarbonate
Mount	Surface
Environment	Interior
General application	Corridor, Stairs
Fixture luminous flux (lm)	2800
Total power consumption (W)	19
Luminaire efficacy (lm/W)	147
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Distribution type	Direct
Photobiological Risk Group	RG0
Operating temperature range	-25°C - 35°C
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	110mA
Driver	Tridonic
IP rating	IP65
IK rating	IK08
Lifespan L70 B50 (hours)	50,000
Warranty	5 years

